

Name: _____

Student ID #: _____

**EECS 170A Section B
Homework #2**


**HW will be collected in DISCUSSION ONLY.
Do not turn your HW in anywhere else, or it will not be accepted.**

DUE: 12:50 PM Wednesday, October 17, 2007.

Please *staple* this sheet to the front of your homework.

1a	1b	2a	2b	2c	2d	3a	3b	Total
/10	/10	/15	/15	/15	/15	/10	/10	/100

- 1) A thin metal film resistor as shown in the figure below has a resistance of 100 k Ω . It is 1 mm long, 10 μm wide, and 1 μm thick.
- Calculate the resistivity (ρ), in units of $\Omega\text{-m}$.
 - Now express the resistivity in units of $\mu\Omega\text{-cm}$, a more common unit.

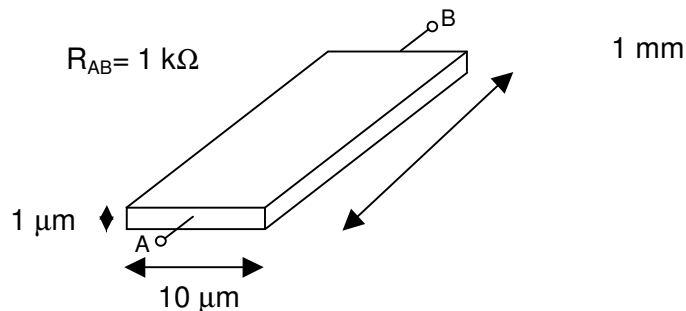

- 2) For Si at 300 K, do the following: (Use cm^{-3} as your units.)
- $N_D = 10^{19} \text{ cm}^{-3}$; $N_A \ll N_D$. Calculate the equilibrium electron concentration (n) and hole concentration (p).
 - $N_D = 2 \cdot 10^{10} \text{ cm}^{-3}$; $N_A \ll N_D$. Calculate the equilibrium electron concentration (n) and hole concentration (p).
 - $N_A = 2 \cdot 10^{19} \text{ cm}^{-3}$; $N_D \ll N_A$. Calculate the equilibrium electron concentration (n) and hole concentration (p).
 - $N_A = 3 \cdot 10^{10} \text{ cm}^{-3}$; $N_D \ll N_A$. Calculate the equilibrium electron concentration (n) and hole concentration (p).
- 3) For the silicon sample at $T = 300 \text{ K}$ shown below, given $N_A = 10^{16} \text{ cm}^{-3}$, $N_D \ll N_A$,
- Find the resistivity ρ of the Si to within 10%. For units, use $\Omega\text{-cm}$. (You may use figure 3.8 from the text.)
 - Calculate the resistance R_{AB} in units of Ω , for the following geometry:

